





Speed, Performance, Value - Perfect Balance

- Non-slip adjustable levelling feet
- Approximately 3 meter long shielded cable
- Available in a range of capacities and platform sizes
- Can be supplied complete with indicator
- Overload protection
- Precision load cell technology
- Rugged mild steel construction
- Stainless steel weighing pan
- Weighing
- Parts counting
- Percentage weighing
- Comparative Weighing
- Shipping and Receiving
- Batching Items for Processing
- Stock and Warehouse Auditing




Technical Specifications

Model	GF 165a	GF 330a	GF 660a	GF 1320a
Maximum capacity	165lb/75kg	330lb/150kg	660lb/300kg	1320lb/600kg
Readability	0.01lb/5g	0.02lb/10g	0.05lb/20g	0.1lb/50g
Platform size	15.7x19.7" / 400x500mm			31.5x23.6" / 800x600mm

General Specifications

OIML Class	III
Display	Not applicable
Excitation voltage	5 - 10 V AC or DC
Housing	Mild Steel/Stainless Steel Pan

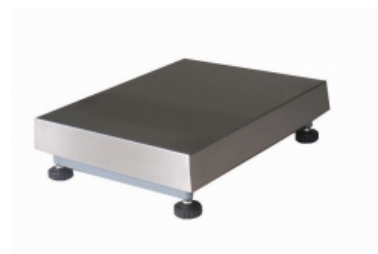

Adam Equipment - offices worldwide

www.adamequipment.com